



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> C01G 1/06, C22B 7/00, C01B 9/02, C01G 9/04, 21/16	<b>A1</b>	<b>(11) International Publication Number:</b> WO 95/33686 <b>(43) International Publication Date:</b> 14 December 1995 (14.12.95)
<b>(21) International Application Number:</b> PCT/NL95/00185 <b>(22) International Filing Date:</b> 1 June 1995 (01.06.95) <b>(30) Priority Data:</b> 9400929 8 June 1994 (08.06.94) NL <b>(71) Applicant (for all designated States except US):</b> NED- ERLANDSE ORGANISATIE VOOR TOEGEPAST- NATUURWETENSCHAPPELIJK ONDERZOEK T.N.O. [NL/NL]; P.O. Box 6070, NL-2600 JA Delft (NL). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> LUGGENHORST, Hen- drik, Jan [NL/NL]; Broekweg 3, NL-7451 MJ Holten (NL). PEEK, Edgar, Manfred, Lawrence [NL/NL]; Marathon 178, NL-2924 XH Krimpen Aan de IJssel (NL). <b>(74) Agents:</b> DE BRUIJN, Leendert, C. et al.; Nederlandsch Octrooibureau, Scheveningseweg 82, P.O. Box 29720, NL- 2502 LS The Hague (NL).		<b>(81) Designated States:</b> AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> METHOD FOR EXTRACTING METALS FROM METAL-CONTAINING MATERIALS BY PYROHYDROLYSIS		
<b>(57) Abstract</b>  The invention relates to a method for extracting metals from metal-containing materials, especially waste, by pyrohydrolysis, the metal-containing materials which contain at least one or more of the metals from the group consisting of Zn, Cd, Pb, Hg, Cu, Sn (as Sn(0) and Sn(II)), As, Sb, Au, Ag and Bi, being made to react at 700-1100 °C, advantageously 800-900 °C, with a gas composition which at least comprises 25-45 % by volume of water vapour, 0-12 % by volume of carbon dioxide, 2-20 % by volume of hydrogen chloride, 0-15 % by volume of carbon monoxide, the remainder being nitrogen and possibly oxygen, the metals from the abovementioned group being extracted in the form of volatile metal chlorides. More in particular, metal-containing materials are used which also contain one or more metals from the group consisting of Fe, Cr, Mn, Ni, Mg, Ca, Al, Si, Ti, Co and Zr, said last group of materials being hydrolysed, under the reaction conditions, to give non-volatile metal oxides, or remaining, in the oxidic form or form (2) a non-volatile metal chloride and therefore remaining behind in the starting material.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Method for extracting metals from metal-containing materials by pyrohydrolysis.

The invention relates to a method for extracting metals from metal-containing materials, especially waste.

5 As is well known, metal-containing waste forms a serious environmental problem. This is particularly true of waste in which the presence of heavy metals which can be leached relatively rapidly, such as cadmium, lead and zinc, entails a potential environmental hazard. Moreover, the metal-containing waste materials form a very heterogeneous  
10 group of materials which comprises, inter alia, metal-containing muds, sludges, filter cakes, metal and filter dusts, batteries, accumulators, printing plates, composites, laminates, catalysts and pickling fluids from, e.g., the electroplating industry. Such waste materials show very large differences among themselves with respect to physical appearance  
15 and composition (type and content of the metals and minor components present). Depending on the type of waste and the source, in the Netherlands alone this involves many tonnes up to tens of thousands of tonnes per metal-containing waste product per year.

Out of the abovementioned enormous amount of metal-containing  
20 waste materials, only 5%, according to estimates, are being worked up in metal recovery processes. This processed portion of the metal-containing waste materials primarily involves waste materials having a (very) high content of valuable metals and a low content of minor components, such as scrap iron, scrap zinc, scrap lead and cabling waste (recovery of  
25 copper). By far the greater part of the metal-containing waste materials is therefore dumped, either on the operator's own plant site or at a dump suitable for this purpose.

In principle, two routes are available for processing complex metal-containing waste materials, viz. [1] the hydrometallurgical route  
30 and [2] the pyrometallurgical route. Both techniques are used for producing metals from primary raw materials (ores). With respect to processing most metal-containing waste materials, however, these conventional hydro- and pyrometallurgical processes do not always provide the direct answer, since:

- 35 - the waste materials, in terms of complexity regarding physical properties and chemical composition, differ from natural ores;  
- waste materials may contain combinations of metals which do not occur in natural ores;

- waste materials may contain components which have an adverse effect on the hydro- and pyrometallurgical processes, and
- virtually all metals including iron are brought into solution, which latter product needs to be removed in the subsequent process, which requires a large amount of chemicals and often affords an iron product which should be regarded as a hazardous waste.

Given the major need for an effective reprocessing method for metal-containing waste, Applicant has therefore carried out in-depth research regarding a uniformly applicable method for extracting (at least part of) the metals from the multitude of metal-containing waste materials.

Surprisingly it was found that the abovementioned object can be achieved if metal-containing materials which contain at least one or more of the metals from the group consisting of Zn, Cd, Pb, Hg, Cu, Sn (as Sn(0) and Sn(II)), As, Sb, Au, Ag and Bi, are made to react at 700-1100°C with a gas composition which at least comprises 25-45% by volume of water vapour, 0-12% by volume of carbon dioxide and 2-20% by volume of hydrogen chloride, and the metals from the abovementioned group are extracted in the form of volatile metal chlorides.

The pyrohydrolysis according to the invention is based on the principle that, under the process conditions indicated above, the metals Zn, Cd, Pb, Hg, Cu, Sn (as Sn(0) and Sn(II)), Au, Ag, As, Sb and Bi, are converted into volatile metal chlorides and can therefore on this basis be removed from the raw material or waste material, and other metals such as Fe, Cr, Mn, Ni, Mg, Ca, Al, Si, Ti, Co and Zr remain in the oxidic form or are converted into metal oxides or non-volatile metal chlorides which, under the abovementioned process conditions, are not volatile and therefore remain behind in the starting material.

On the basis of the above it is therefore possible, according to the invention, to effect a separation between, on the one hand, metals which under the reaction conditions are converted into volatile metal chlorides and, on the other hand, metals which under these conditions remain non-volatile metal oxides or are converted thereto or are converted into non-volatile metal chlorides. It is worth mentioning that metals which have a strong tendency to form metal oxides and therefore remain in the residue can sometimes be used in, inter alia, the production of building materials and in the steel industry and, depending on the specifications of the metal oxide, also for specific applications

such as, for example, the manufacture of permanent magnets. The residue can therefore be reused in a useful manner and need not be regarded as hazardous waste. At the same time, the metals collected as volatile metal chlorides can be used for a variety of purposes, either as such or after  
5 further processing and, if appropriate, separation from one another by means of hydrometallurgical techniques such as solvent extraction, precipitation, cementation, ion exchange and electrodeposition.

With respect to the pyrohydrolysis process it should be noted that this process per se is already being used for recovering  
10 hydrochloric acid from iron-containing pickling acid and for preparing pure metal oxides such as nickel oxide and magnesium oxide. More in particular, the article "The Regeneration of Hydrochloric acid from Waste Pickle Liquor using the Keramchemie/Lurgi Fluidized-Bed Reactor System" Canadian Mining and Metallurgical Bulletin, February 1975, pp. 89-93, in  
15 particular p. 90, represents the conversion of iron chloride, present in pickling acid, into iron oxide by the equation:



Such an HCl regeneration can be carried out not only by means of a fluidized bed, but also via a "spray-roaster" process as described in the  
20 article "Hydrochloric Acid Regeneration as Applied to the Steel and Mineral Processing Industries", Canadian Mining and Metallurgical Bulletin, February 1975, pp. 1-7.

Moreover, in Physical Chemistry of Extractive Metallurgy, Proceedings of an International Symposium... held as the AIME Annual  
25 Meeting, New York, New York, Feb. 24-28, 1985, the article "Pyrohydrolysis of Nickel Chloride Solution in a 30-inch diameter Fluidized-bed Reactor", Jha C.S. et al. gives a description of a pyrohydrolysis reaction involving nickel chloride, nickel oxide being obtained according to the equation  $\text{NiCl}_2 + \text{H}_2\text{O} \rightarrow \text{NiO} + 2\text{HCl}$ .

30 With respect to the abovementioned literature it is emphasised that none of the pyrohydrolysis processes discussed above is used to effect separation from each other of metals which belong to the abovementioned two groups or, as the case may be, to achieve extraction of metals which can be volatilized to form chlorides, from waste  
35 materials containing these metals.

As indicated above, the invention relates to the extraction of metals from metal-containing materials, in particular from wastes such as e.g. mixtures of metals and plastics, electric-furnace dust, cupola dust and shredder dust.

With respect to the temperature employed in the pyrohydrolysis according to the invention it is pointed out that the temperature is preferably in the range of 800-900°C. Concerning the lower limit of 800°C, attention is drawn to the fact that at 800°C or higher the formation of toxic organochlorine compounds such as PCBs and PAHs, which are formed especially in the temperature range of 200-400°C, and likewise that of dioxins and furans will not or virtually not take place. The preferably maintained upper limit of 900°C is primarily applied on economic grounds.

The hydrogen chloride content in the pyrohydrolysis gas is, as indicated above, 2-20% by volume. Although a lower HCl content is possible in principle, in practice this usually results in a decrease of the removal rate of metals which can be volatilized to form chlorides. A high HCl content in the pyrohydrolysis gas, of more than 20% by volume, does result in an improvement of the reaction rate in a general sense, as would be expected, but this is as yet not seen as worthwhile, since the selectivity of the separation is generally lost, i.e. even the metal oxides regarded as stable then exhibit the tendency to be volatilized as metal chloride. Attention is drawn in this context to the reactions of lead and cadmium with HCl which proceed very rapidly at an HCl concentration of as low as 2.5% by volume.

With respect to the water vapour content of the pyrohydrolysis gas it is further pointed out that this may vary within a wide range. For practical considerations, however, the range has been set to 25-45% by volume, although the reaction can also be carried out below 25% by volume and above 45% by volume. More in particular it should be noted in this context that the presence of water vapour affects the selectivity of the reaction. The fact is that an increase in the water vapour concentration makes it possible for metals which, at a low water vapour concentration, evaporate as chlorides to be converted into oxide after all or, as the case may be, to remain in the oxidic form. Lowering the water vapour concentration in the pyrohydrolysis gas has the opposite effect, since in that case more metals are converted into volatile chlorides.

With respect to the pyrohydrolysis gas it is pointed out, for the sake of completeness, that the remaining fraction of the gas is formed by nitrogen gas which can be supplemented, as required, with oxygen and/or other gases. In practice, oxygen is present in the reaction gas for the purpose of the pyrohydrolysis reaction and for the combustion of natural gas or another fuel. Depending on the ratio air/fuel, a

variable oxygen level may be present after the combustion. The tube furnace experiments have shown that oxygen does not have an adverse affect on the separation of metals. The pyrohydrolysis of ferrous chloride, however, encounters problems if more than approximately 2% by volume of oxygen is present, owing to the oxidation of ferrous chloride to give the not readily hydrolysable ferric chloride. Therefore, the oxygen content in the case of ferrous chloride should be kept as low as possible, preferably below 1% by volume. With other reactions, the oxygen concentration can be between 0 and 8% by volume.

10 In contrast to oxidizing conditions it is also possible to create reductive conditions in the pyrohydrolysis gas. Both carbon monoxide and hydrogen may be considered as suitable reductants. It was found, surprisingly, that even low concentrations of CO, varying from 0 to 15% by volume, preferably from 0.2 to 5% by volume considerably  
15 accelerate the volatilization of metal chlorides, for example zinc chloride, without the valency of the metals present in the chlorides changing or the metals being reduced. For example, zinc remains bivalent and is therefore not reduced.

The residence time of the metal-containing waste material under  
20 the pyrohydrolysis conditions principally depends on the reaction rate between the HCl and the metals and metal compounds which can be volatilized to form chlorides, and therefore also on the type of waste. Such residence times may vary from, for example, 0.1 hour in the case of, for example, a lead-containing waste material up to a number of hours,  
25 for example 5 hours. The residence time also depends on the removal efficiency desired for the metals to be removed.

The method according to the invention can be implemented in a variety of devices such as a tube furnace or a rotary furnace. Advantageously, the method can be implemented in a fluidized-bed reactor,  
30 particularly if the waste materials can be fed to the reactor in a fine suspension, since the fuel consumption can thereby be reduced. A further advantage of employing a suspension of waste materials is that a much higher "metal concentration" can be used than if all the waste materials first have to be dissolved and be passed to the reactor via the liquid  
35 phase. This is because, in the case of a suspension, much less liquid has to be evaporated in the system per tonne of solid produced, resulting in a significant energetic advantage being achieved.

The metals obtained according to the invention and volatilized as chlorides can be collected as exhaust gas and be processed, as an

acidic solution of metal chlorides, according to the methods known from the prior art such as solvent extraction, precipitation, cementation and electrodeposition. The hydrochloric acid which is present in the exhaust gas can be reused, after condensation and absorption, for preparing the feed for the pyrohydrolysis reactor.

#### Legend

- Fig. 1: Graphic representation of the removal of zinc from synthetic zinc ferrite at various carbon monoxide (0-2% by volume) and carbon dioxide concentrations in the reaction gas.
- 10 Fig.2: Graphic representation of the removal of zinc from synthetic zinc ferrite at various carbon monoxide (4.5-9% by volume) and carbon dioxide concentrations in the reaction gas.

The method according to the invention is explained in more detail with reference to the following examples. These examples should not, however, be interpreted as limiting the scope of the invention.

#### Example I

An amount of 2 g of waste material A containing the most important metals stated below in Table A

TABLE A

Element	
Iron (%)	19.1
Zinc (%)	15.2
Lead (%)	2.17

Fe, Zn and Pb being present as the oxide, as well as a small amount of Ca, Al, Mg, Si as the oxides and Na as the chloride was exposed, in a tube reactor having an internal diameter of 28 mm, at a temperature of 827°C, for 60 minutes, to a standard pyrohydrolysis gas of 35% by volume of water vapour (H<sub>2</sub>O), 6% by volume of carbon dioxide (CO<sub>2</sub>), 7.5% by volume of hydrogen chloride (HCl) and 51.5% by volume of nitrogen (N<sub>2</sub>).

Apart from the standard pyrohydrolysis gas, other gas compositions as shown in Table B were used, with the proviso that an



increase or decrease of any gas component was linked to the decrease or increase of the nitrogen content of the gas. Table B also illustrates the results obtained at different residence times and different pyrohydrolysis temperatures, respectively.

5

TABLE B

10

15

Test	Zn (%) <sup>*</sup>	Rem (%) <sup>**</sup>	Pb (ppm) <sup>*</sup>	Rem (%) <sup>**</sup>
Standard	2.05	90.77	574	98.19
2.5 mol% HCl	9.26	51.59	769	97.18
12.5 mol% HCl	0.09	99.65	382	98.95
Residence time 30 min	2.76	86.68	721	97.56
Residence time 120 min	0.179	99.33	423	98.90
T = 727°C	8.3	54.07	1150	95.54
with 4 mol% of CO	1.37	94.37	282	99.19
with 10 mol% of CO	1.92	92.14	192	99.45

\* Content of the metal left behind in the treated starting material.

\*\* Rem = removal efficiency, calculated on the basis of the amount of metal present in the starting material.

## 20 Example II

A sample of 2 grams of waste material A was treated in a tube furnace having an internal diameter of 28 mm, with the aid of pyrohydrolysis in order to remove the lead and zinc present, the following process conditions being employed:

25 Gas composition: water vapour (H<sub>2</sub>O) 35 % by volume  
carbon dioxide (CO<sub>2</sub>) 6 % by volume  
hydrogen chloride (HCl) 7.5 % by volume  
nitrogen (N<sub>2</sub>) 51.5 % by volume

Temperature: 827°C

30 Residence time: 60 min

The abovementioned experiment was carried out in duplicate, the following removal efficiencies being achieved:

	Removal of zinc (%)	Removal of lead (%)
Experiment (1)	82.7	97.4
Experiment (2)	84.8	97.7

Example III

An amount of 2 g of waste material B having the following  
5 composition,

TABLE C

Element	
Iron (%)	41.6
Zinc (%)	0.89
Calcium (%)	15.7
Lead (%)	0.22
Aluminium (%)	0.18
Magnesium (%)	0.52
Silicon (%)	2.15
Sodium (%)	0.21
Chlorine (%)	0.06
Carbon (%)	1.61
Dry substance content	82.3

all the metals being present as hydroxide or oxide and sodium as the  
20 chloride, was exposed, in a tube reactor having an internal diameter of  
28 mm, at a temperature of 827°C, for 60 minutes, to a standard  
pyrohydrolysis gas of 35% by volume of water vapour (H<sub>2</sub>O), 6% by volume  
of carbon dioxide (CO<sub>2</sub>), 7.5% by volume of hydrogen chloride (HCl) and  
51.5% by volume of nitrogen (N<sub>2</sub>).

25 Apart from the standard pyrohydrolysis gas, other gas  
compositions as shown in Table D were used, with the proviso that an  
increase or decrease of any gas component was linked to the decrease or  
increase of the nitrogen content of the gas. Table D also illustrates the  
results obtained at different residence times and different

pyrohydrolysis temperatures, respectively.

TABLE D

Test	Zn (%) *	Rem (%)**	Pb (ppm)*	Rem (%) **
Standard	0.51	42.7	<40	98.18
2.5 mol% HCl	0.75	15.73	125	94.32
12.5 mol% HCl	0.31	65.17	55	97.50
Residence time 30 min.	0.38	57.30	28	98.73
Residence time 120 min.	0.23	74.16	64	97.10
T = 727°C	0.53	40.45	146	93.36
T = 927°C	0.32	64.04	20	99.09
with 5 mol% of CO	0.23	74.16	84	96.18
with 10 mol% of CO	0.26	70.78	71	96.77

\* Content of the metal left behind in the starting material.

\*\* Rem = removal efficiency, calculated on the basis of the amount of metal present in the starting material.

#### Example IV

A sample of 2 grams of the waste material B employed in Example III was treated in a tube furnace having an internal diameter of 28 mm, with the aid of pyrohydrolysis, in order to remove the lead and zinc present therein, the following process conditions being employed:

Gas composition: water vapour (H<sub>2</sub>O) 35 % by volume  
carbon dioxide (CO<sub>2</sub>) 6 % by volume  
carbon monoxide (CO) 2.5 % by volume  
hydrogen chloride (HCl) 10 % by volume  
nitrogen (N<sub>2</sub>) 46.5 % by volume

Temperature: 827°C

Residence time: 60 min

The abovementioned experiment was carried out in duplicate, the following removal efficiencies being achieved for Zn and Pb:

	Removal of zinc (%)	Removal of lead (%)
Experiment (A)	86.0	96.2
Experiment (B)	82.9	95.8

**Example V**

2 g of synthetic zinc ferrite ( $\text{ZnFe}_2\text{O}_4$ ) were exposed, in a tube furnace at  $827^\circ\text{C}$  for 1 hour, to a pyrohydrolysis gas of 7.5% by volume of HCl, 35% by volume of  $\text{H}_2\text{O}$  and 57.5% by volume of  $\text{N}_2$ . Data with respect to the starting material and the zinc removal efficiency after 1 hour are shown in Table E below.

TABLE E

10 **Characteristic chemical, physical and mineralogical properties of synthetic zinc ferrite**

Chemical composition		% by weight of Zn	% by weight of Fe	
15	Sample A (atomic absorption spectrometry)	27.5	48.2	
	Sample B (atomic absorption spectrometry)	26.3	47.6	
	Sample C (atomic absorption spectrometry)	25.8	47.7	
20	Theoretical composition	27.1	46.3	
Physical properties		BET area	% of volatilized Zn	
25	Sample A	32 $\mu\text{m}$	0.40 $\text{m}^2/\text{g}$	45.6
	Sample B	18 $\mu\text{m}$	0.69 $\text{m}^2/\text{g}$	26.0
	Sample C	13 $\mu\text{m}$	0.90 $\text{m}^2/\text{g}$	52.2

**Mineralogical properties**

Phases (XRD) Franklinite ( $\text{ZnFe}_2\text{O}_4$ ) for all three samples

30 After a reaction period of 4 hours, the amount of volatilized zinc was 99.5% for all the samples shown in Table E, calculated on the basis of the amount of zinc present in the starting material.

Example VI

2 g of the zinc ferrite samples B and C used in Example V were exposed, in a tube furnace at 827°C for 1 hour, to a pyrohydrolysis gas of 7.5% by volume of HCl, 35% by volume of H<sub>2</sub>O, 12.8% by volume of CO<sub>2</sub>, 0.5% by volume of CO and 44.2% by volume of N<sub>2</sub>.

The results obtained in this experiment are illustrated in Table F below.

TABLE F

	Sample B	Sample C
Removal efficiency Zn according to Ex.V	26.0	52.2
Removal efficiency Zn according to this example	72.0	66.0

It is possible to conclude from the above Table F that as a result of the presence of 0.5% of volume of CO an increase in the zinc removal efficiency was achieved of 175% in the case of Sample B and of 25% in the case of Sample C.

The above experiment was repeated with pyrohydrolysis gases having an altered CO content and CO<sub>2</sub> content, respectively, and the results thus obtained are depicted graphically in Figure 1 and Figure 2.

Example VII

2 g of the zinc ferrite sample C used in Example V were exposed, in a tube furnace at 827°C for 1 hour, to a pyrohydrolysis gas of 4.67% by volume of CO, 8.67% by volume of CO<sub>2</sub>, 35% by volume of H<sub>2</sub>O, 7.5% by volume of HCl, the remainder being N<sub>2</sub>.

Under these conditions, a virtually complete removal of zinc (>98.0%) was achieved.

Example VIII

The method described in Example V was implemented with sample C, with the proviso that the nitrogen content was reduced for the benefit of the oxygen to be incorporated into the gas mixture.

The results achieved with this experiment are shown in Table G below.

TABLE G

O <sub>2</sub> percentage used in the pyrohydrolysis gas	0	2	4	8	12
Zinc removal efficiency achieved in %	50.5	51	52.5	65	67

5

## CLAIMS

1. Method for extracting metals from metal-containing materials, especially waste, characterized in that metal-containing materials which contain at least one or more of the metals from the group consisting of  
5 Zn, Cd, Pb, Hg, Cu, Sn (as Sn(0) and Sn(II)), As, Sb, Au, Ag and Bi, are made to react at 700-1100°C with a gas composition which at least comprises 25-45% by volume of water vapour, 0-12% by volume of carbon dioxide and 2-20% by volume of hydrogen chloride, and the metals from the abovementioned group are extracted in the form of volatile metal  
10 chlorides.
2. Method according to Claim 1, characterized in that metal-containing materials are used which also contain one or more of the metals from the group consisting of Fe, Cr, Mn, Ni, Mg, Ca, Al, Si, Ti, Co and Zr.
- 15 3. Method according to Claim 2, characterized in that zinc-iron-containing waste materials are used.
4. Method according to any one of Claims 1-3, characterized in that the reaction is carried out at a temperature of 800-900°C.
5. Method according to any one of Claims 1-4, characterized in  
20 that the reaction is carried out in a fluidized bed.
6. Method according to any one of Claims 1-5, characterized in that the reaction is carried out with a gas composition which also contains 0-15% by volume of carbon monoxide.
7. Method according to Claim 6, characterized in that the reaction  
25 is carried out with a gas composition which also contains 0.2-5% by volume of carbon monoxide.
8. Method according to any one of Claims 1-7, characterized in that the reaction is carried out with a gas composition which also contains 0-8% by volume of oxygen.
- 30 9. Method according to any one of Claims 1-8, characterized in that the metal-containing materials are fed to the reactor in the form of a suspension.

\*\*\*

fig - 1


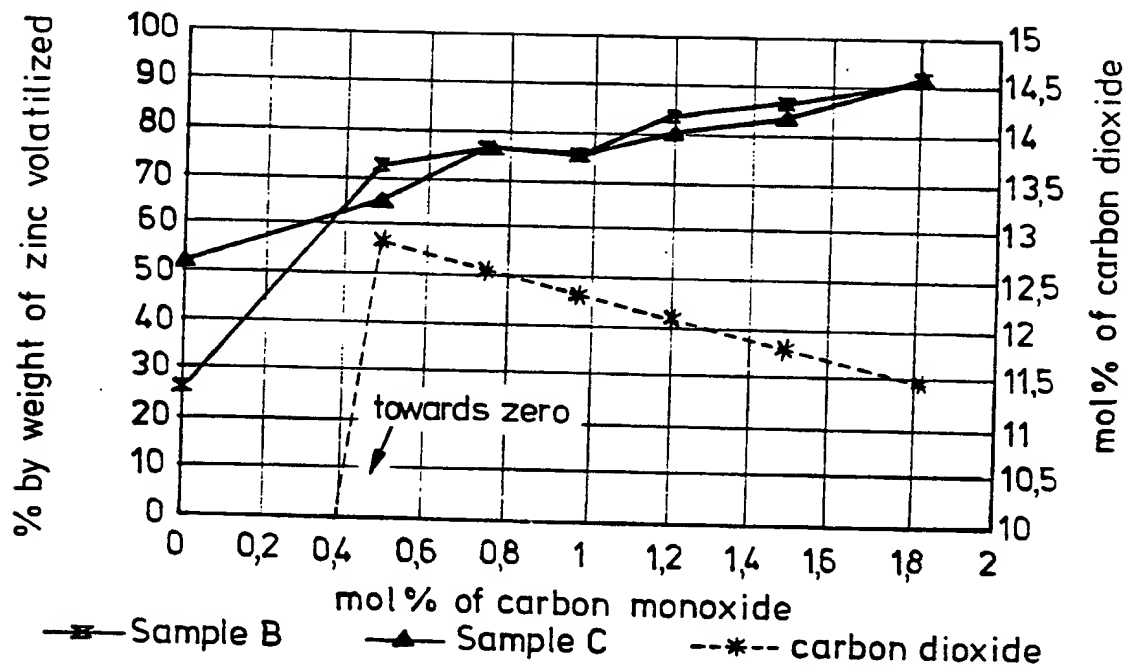


fig - 2



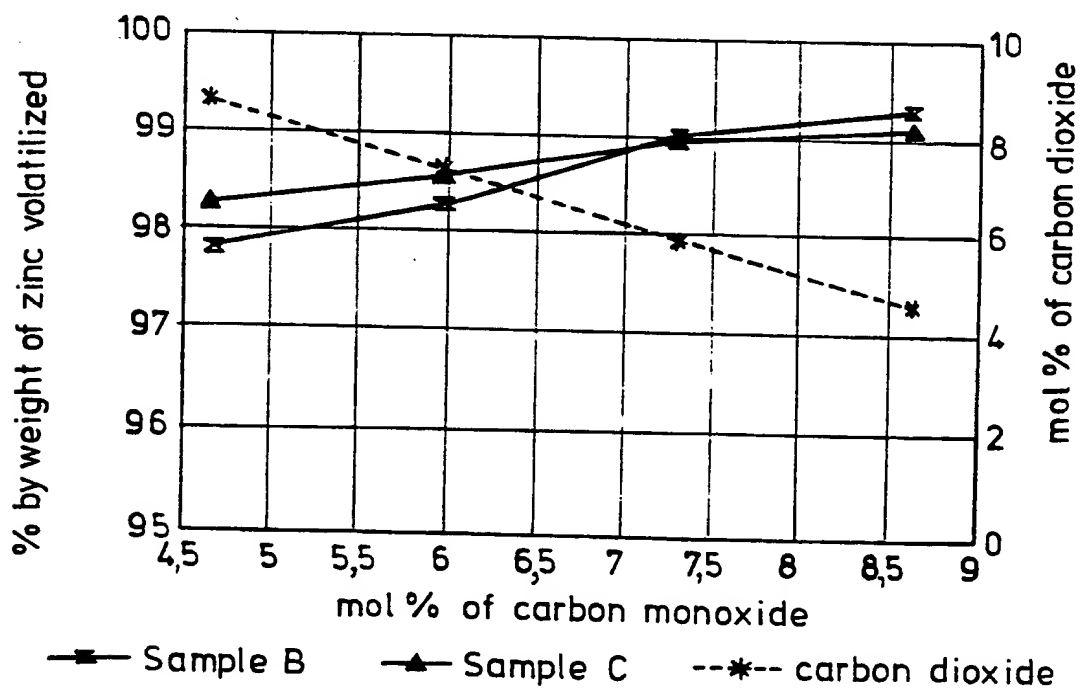

## INTERNATIONAL SEARCH REPORT

Application No  
PCT/NL 95/00185

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C01G1/06 C22B7/00 C01B9/02 C01G9/04 C01G21/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C01G C22B C01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR-A-2 125 418 (LARCO SOCIETE MINIERE ET METALLURGIQUE DE LARYMNA) 29 September 1972 see the whole document ---	1-4, 8
A	COMPTE RENDUS, vol. 242, 1956 PARIS, pages 2947-2950, A. BOULL ET C CHAL ROUX 'sur l'action de l'acide chlorhydrique gazeux sur les oxydes métalliques' see the whole document ---	1
A	GB-A-1 056 488 (H.B. BAETZ) 25 January 1967 ---	
A	US-A-2 036 664 (E.W. WESCOTT) 7 April 1936 -----	

☐

Further documents are listed in the continuation of box C.

☒

Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

17 August 1995

Date of mailing of the international search report

31. 08. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

LIBBERECHT, E

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Patent Application No

PCT/NL 95/00185

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR-A-2125418	29-09-72	LU-A- 62583 DE-A- 2206625 GB-A- 1389282	30-10-72 17-08-72 03-04-75
GB-A-1056488		NONE	
US-A-2036664	07-04-36	NONE	